KEY EXCHANGE BOX, Z AND Y SERIES

Z-FSB-H-1/2
Z - Key exchange box, 1/2 keys



- Designed to enable the release of keys by insertion of an initial key
- Extremely durable
- Key release in any order

PRODUCT DESCRIPTION

A typical application of the Z and Y key exchange box is machine guarding with one or more access points to the hazardous area. The key exchange box is used as a part of a safety system, which ensures a machine is shut down, before access to the hazardous area is allowed.

Z-series:

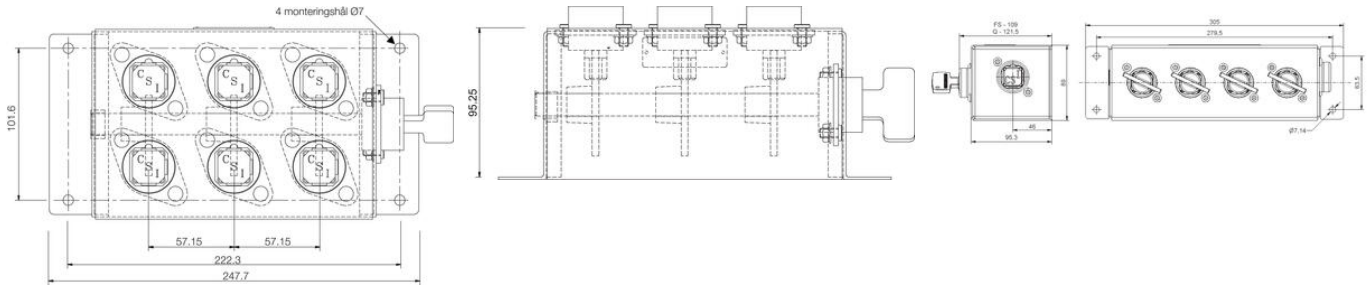
- Designed to enable the release of keys by insertion of an initial key
- Releases up to 5 keys in any order
- Made for the usage in situations where multiple access points to the hazardous area are given
- Designed to be the link between the isolation units and access interlocks
- Supplied in an enclosure suitable for surface mounting
- Available with FS or Q type lock portions

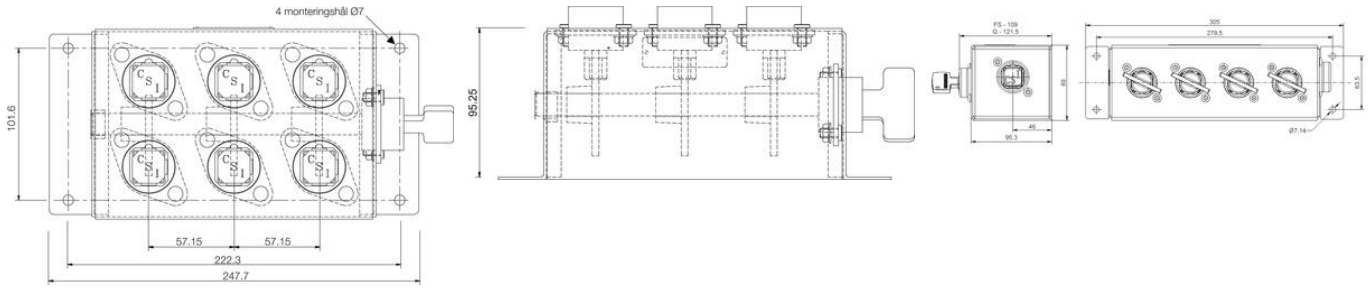
Y-series:

- Designed to enable the release of keys by insertion of an initial key
- Releases 6 or more keys (with no upper limit) in any order
- Made for the usage in situations where multiple access points to the hazardous area are given
- Designed as the link between the isolation units and access interlocks
- Supplied in an enclosure suitable for surface mounting
- Available with FS or Q type lock portions

SPECIFICATIONS

Approvals	CE
Conforming To	MD
Material Protection	Painted steel
Materials Locks	Brass
Mttfd	11363 year
Temperature ambient from	-40 °C
Temperature ambient to	140 °C
Weight	1 kg


4 monteringshål Ø7
101.6
57.15
57.15
222.3
247.7
95.25
FS - 109
G - 121.5
89
46
95.3
305
279.5
63.5
Ø7.14


4 monteringshål Ø7
101.6
57.15
57.15
222.3
247.7
95.25
FS - 109
G - 121.5
89
46
95.3
305
279.5
63.5
Ø7.14