

## DATALOGIC - SG4-BODY COMPACT BASE

SG4-S4-120-PP-E

SG4-S4-120-PP-E 4 BEAM TYPE 4

- Body protection (2, 3 and 4 beam), Type 4, PL e
- Range 0.5-50 m
- Protective height 500-800-900-1200 mm



### PRODUCT DESCRIPTION

Datalogic safety light curtain SG4-BODY COMPACT Base is made for body detection with a range of up to 50 meters. The safety light curtain is available as type 4, and maintains highest level PL e according to the latest safety standards, EN ISO 13849-1 and EN 62061.

SG4-BODY COMPACT Base has a compact housing with basic functions as integrated manual reset /automatic reset and input for monitoring of external contactors (EDM). Configurations will be made by DIP switches.

SG4-BODY COMPACT models are provided in 2 different versions: Base and Muting.


SG4-BODY COMPACT Base safety light curtain include two safe electronic short-circuit detection outputs (PNP). If potential free contacts are needed We can offer forexample Datalogic safety relay CSME. Safety light curtain supplied complete with standard bracket.

Datalogic has a 3 year warranty for safety light curtains.


### SPECIFICATIONS

Approvals	CE, cULus, TÜV
Cable Length Max	50 m
Conforming To	EMC, LVD, MD
Contact Current Max	0.5 A
DC	98,90%
Function	EDM, Manual/Automatic restart
IP Class	IP65
Material of body	Aluminium
Mttd	384 year
Number Of Beams	4

PL	e (EN ISO 13849-1)
Protection height	1200 mm
Reaction time	16 ms
Resolution	415 mm
Sensing distance	0,5-50 m
SIL	3 (EN IEC 61508)
Supply voltage	24 V DC
T1 (Life Time In Years)	20
Temperature range bearing, from	-25 °C
Temperature range bearing, to	70 °C
Temperature range from	-10 °C
Temperature range to	55 °C
Voltage Tolerance	±20 %

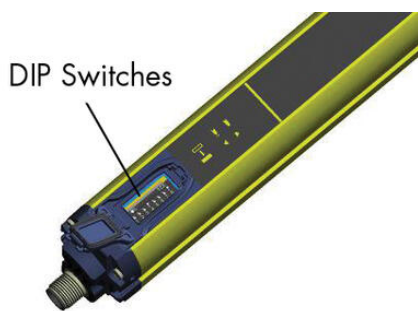

DIP Switches

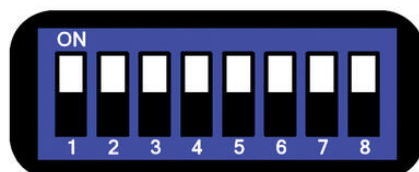

dip-sw	Function	ON	OFF
1,5	-	-	-
2,6	-	-	-
3,7	EDM	Deactivated	Activated
4,8	Reset	Automatic	Manual

